


P7500I

Compact & Solid



FEATURES

- Inverter technology: stable power for safe operation of sensitive electronics.
- OHV engine provides consistent power for multiple applications.
- Low-oil level shutdown automatically safeguards engine from damage.
- Economy mode automatically adjusts the engine speed to the optimum level to provide excellent fuel economy and noise reduction.
- USB ports charges your mobile electronics so you can stay connected.
- Compact and Solid
- Easily transportable by handle.
- Ideal for applications requiring low noise
- Connector for Parallel kit
- Oil Bottle, Funnel and Plugs Included in the carton box

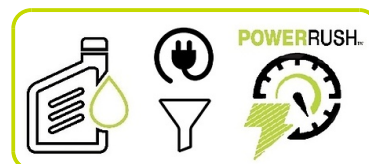

POWERRUSH

MORE STARTING CAPACITY ALLOWING YOU TO DO MORE WITH LESS. Powerrush increases electrical current upon demand, above rated output when starting electric motors.

Principales Características

Frecuencia	Hz	50
Voltaje	V	230
Fases		1
Potencia Máxima	Watts	7000
Potencia nominal	Watts	6500



Motor


Marca Motor	Pramac	
Tipo	OHV	
Emisión de escape optimizado para 97/68 50Hz (COM)	Stage V	
Velocidad de funcionamiento nominal	rpm	Variable
Combustible	Gasolina	
Sistema de arranque	Eléctrico (+Manual)	
Deposito de aceite	l	1.45
Sistema de protección por bajo nivel de aceite	√	

Alternador

Regulación Voltaje	Inverter
--------------------	----------


Dimensiones

Longitud	(L) mm	950
Ancho	(W) mm	765
Altura	(H) mm	773
Peso seco	Kg	146
Dimensión de caja de cartón LxWxH	mm	1010x660x742

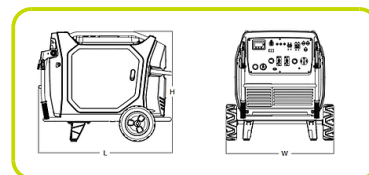

Autonomía

Capacidad de tanque de combustible	25	
Consumo de combustible @ 75%	l/h	2.25
Autonomía al 75%	h	11

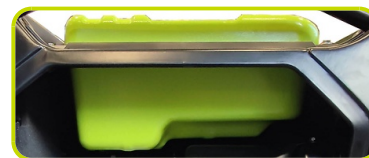

Nivel sonoro

Nivel sonoro garantizado (LWA)	dBA	92
Nivel de presión de ruido @ 7 mt	dB(A)	64

ENCHUFES

SCHUKO 230V 16A IP44	2
2P+T CEE 230V 32A IP44	1



The information is aligned with the Data file at the time of download. Printed on 22/06/2023 (ID 19635)

©2023 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

